



# HP Mini 210-2070NR Hard Drive Replacement

This a step by step guide showing how to replace your hard drive.

Written By: Alek Linquist



## INTRODUCTION

Use this guide to remove and install a new hard drive.

---



### TOOLS:



- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery and Service Access Cover



- ⓘ Before beginning, make sure that your computer is turned off and all external power cords are disconnected.
- Close the laptop and turn it over, so that the underside is up and the silver battery bay is facing towards you.

## Step 2

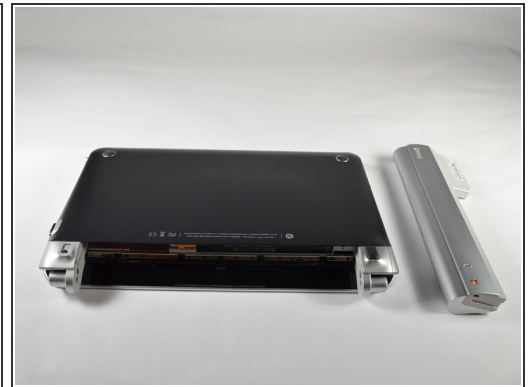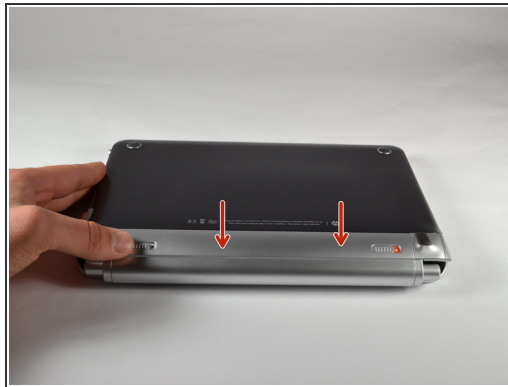

- Locate the battery locking latch on the bottom right corner and slide it inward to unlock the battery.
- Locate the battery release latch on the bottom left and slide it inward.
- Pull the battery towards you to remove it from the laptop.



## Step 3




- Locate the service access cover release lever and slide it to the right.
- While holding the lever to the right, lift up the laptop's bottom cover gently and remove the cover from the laptop.

## Step 4



- If you are performing any installations after the battery, orient the computer so that the underside is up, and the battery port is facing away from you.



## Step 5 — Hard Drive

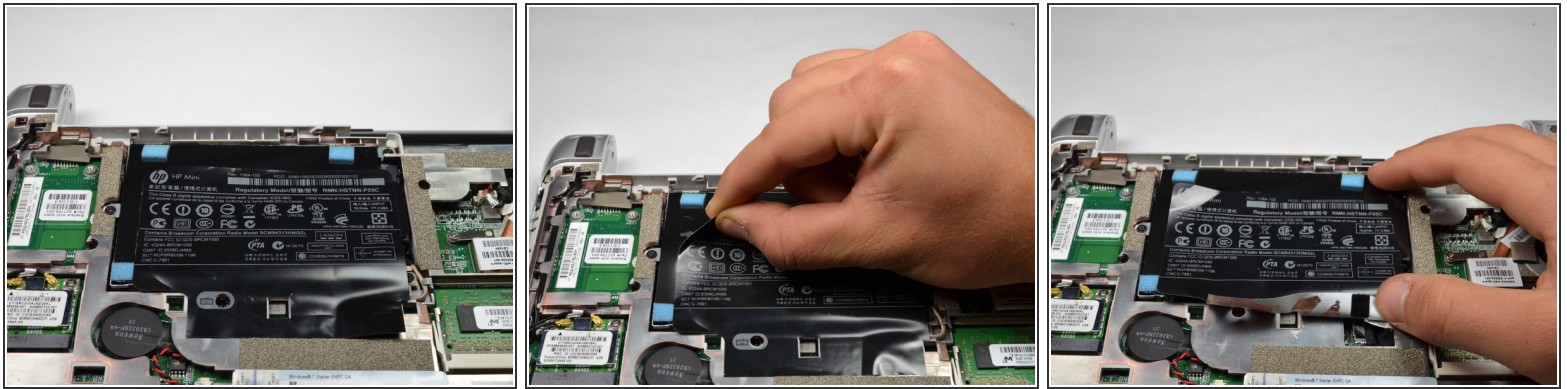

- Locate the HP product sticker, a black square sticker covered with product details, at the top of the computer.
  - Pull off the HP product sticker, starting at the top right corner and pulling diagonally down towards the bottom right.
- ⚠ Be careful not to pull up the black hard drive plastic connector with the sticker. Also, removing this sticker will void your warranty.
- Remove the HP product sticker.




## Step 6

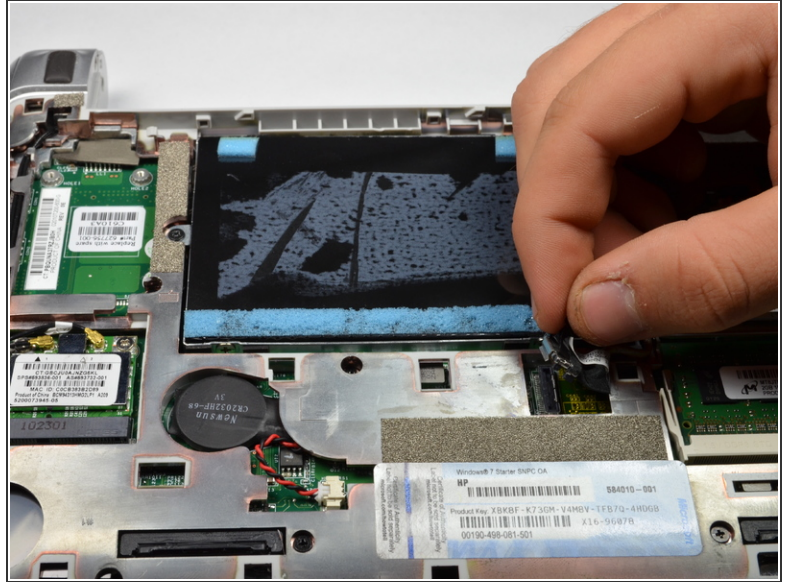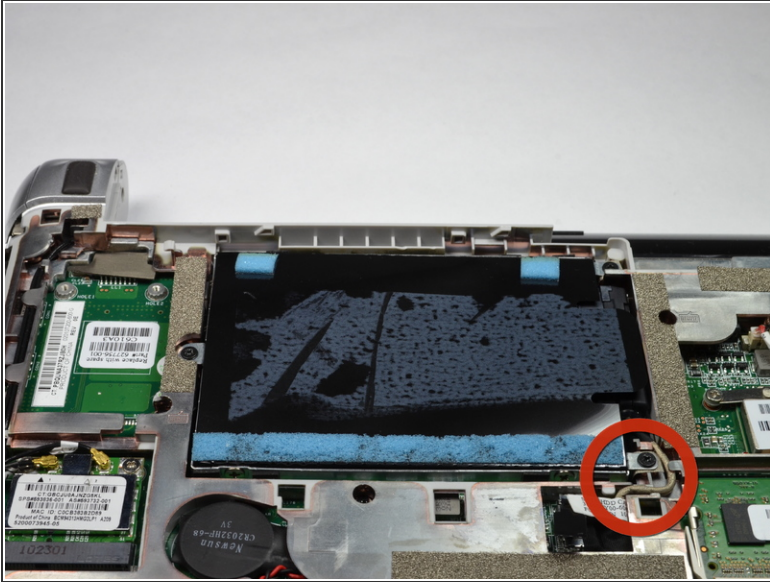

- Locate the hard drive, where the HP Product sticker used to be.
- Locate the hard drive cable, connected to the hard drive.
- Disconnect the hard drive cable by gently pulling upward.

## Step 7

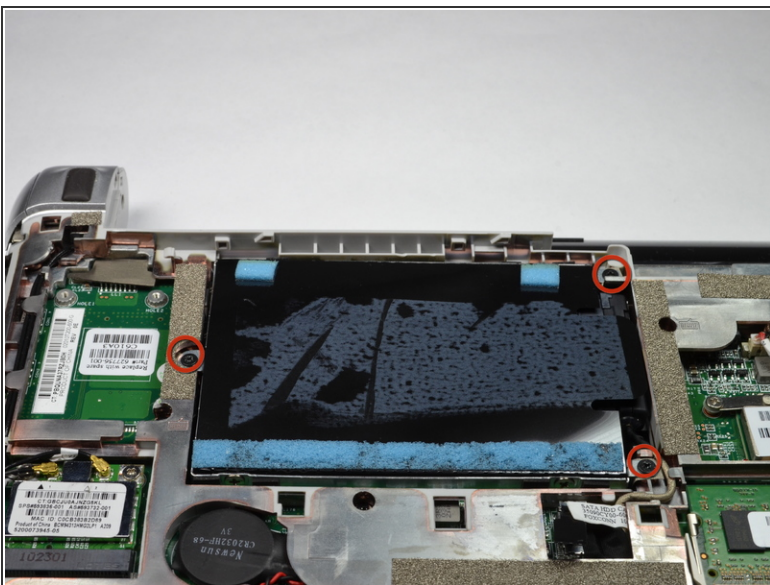

- Using a 00 Phillips screwdriver, unscrew and remove the three 2.0 x 4.0 Philips screws holding the hard drive in place.




## Step 8



- Use the Mylar Tab located on the right side of the hard drive to pry up the hard drive.
- Remove the hard drive.

## Step 9

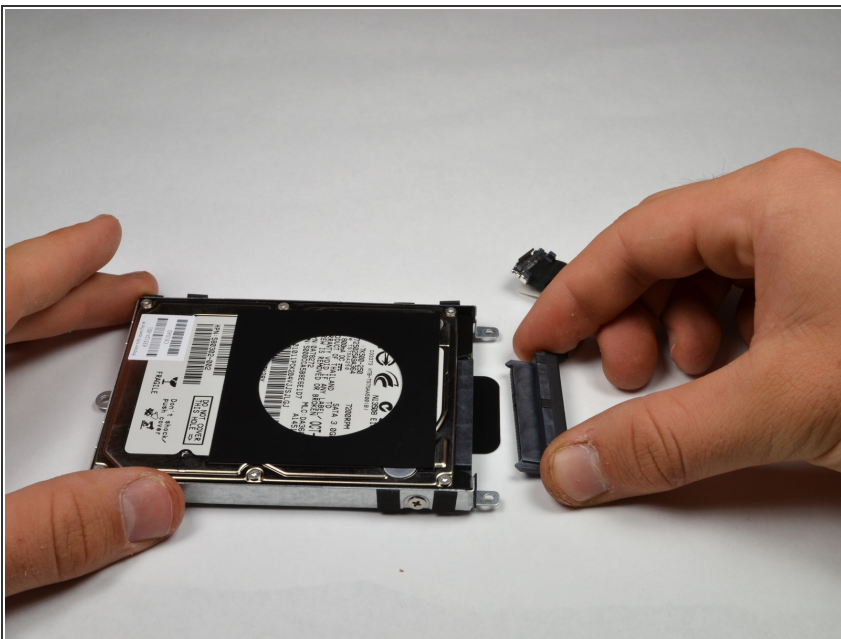

- Lay the hard drive down with the underside facing up.
- Pull and remove the hard drive pin connector from the hard drive.

To reassemble your device, follow these instructions in reverse order.

